


SIBLI 17 INOX

Weight kg 39 - Weight of the ground socket kg 14

FITTING OPERATIONS WITH THE ARMoured STAINLESS STEEL SQUARE POST FITTED WITH HIGH SECURITY LOCK. REMOVABLE AFTER UNLOCKING BY MEANS OF A CUSTOM-MADE KEY


1- A concrete foundation is to be made in a masterly fashion to embed the stainless steel ground socket, following the dimensions indicated below, a mettalic framing can help during this operation, to be positioned around the socket between the four jutting hubs and the top flange.

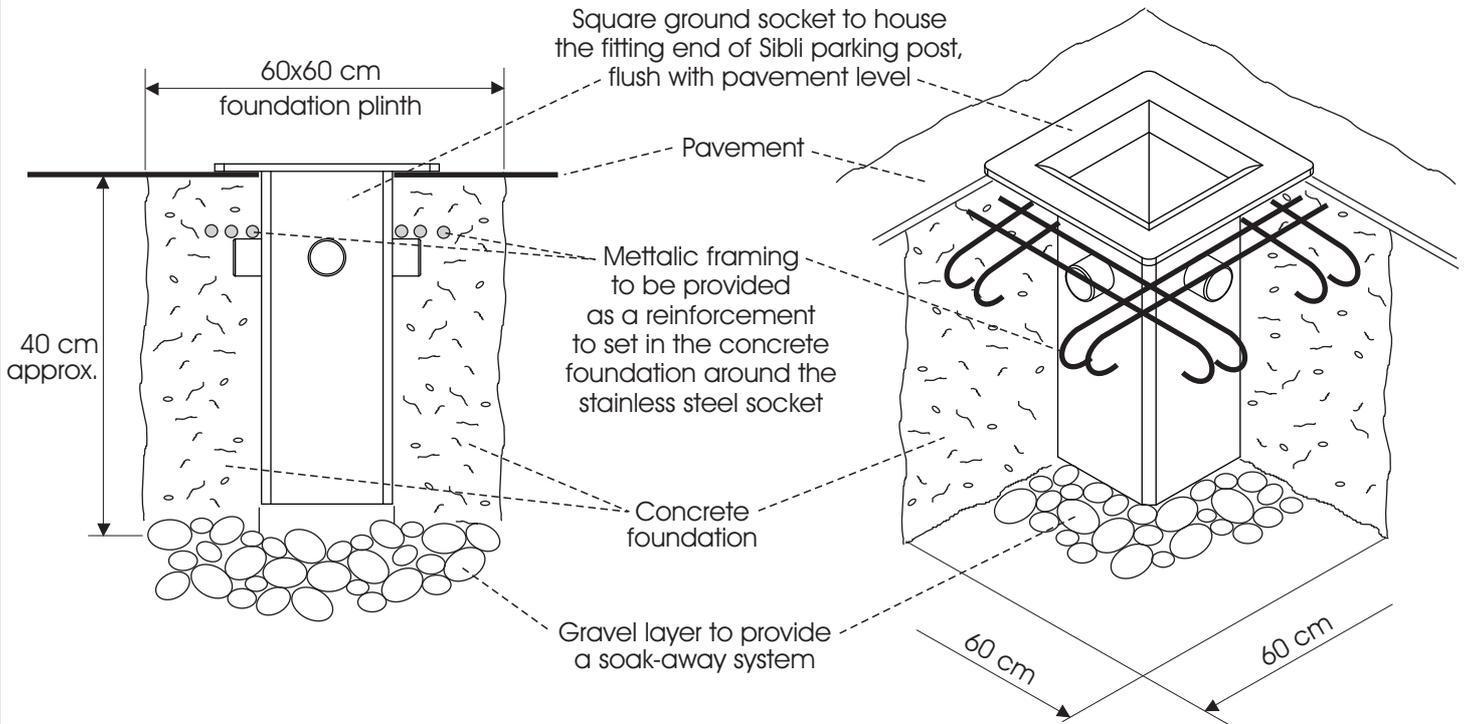

SECTION VIEW OF THE PLINTH

CUTAWAY DRAWING OF THE PLINTH

2- Once completed the fixing operations of the stainless steel ground socket, position the armoured post Sibli Inox on to the socket. The handling ring fitted to the post and the roller at the bottom will facilitate this operation. Once the post is fitted into its socket, swing aside the flap protecting the high security lock and insert the personalized key into it, push the key fully in and turn it twice anti-clockwise: in this way the armoured square post Sibli Inox is firmly locked in the required position. To unlock and remove the post, repeat the same operations in the reverse sequence; once Sibli has been removed, it can be stored in a suitably designed cradle. The socket can be covered by a stainless steel plate.

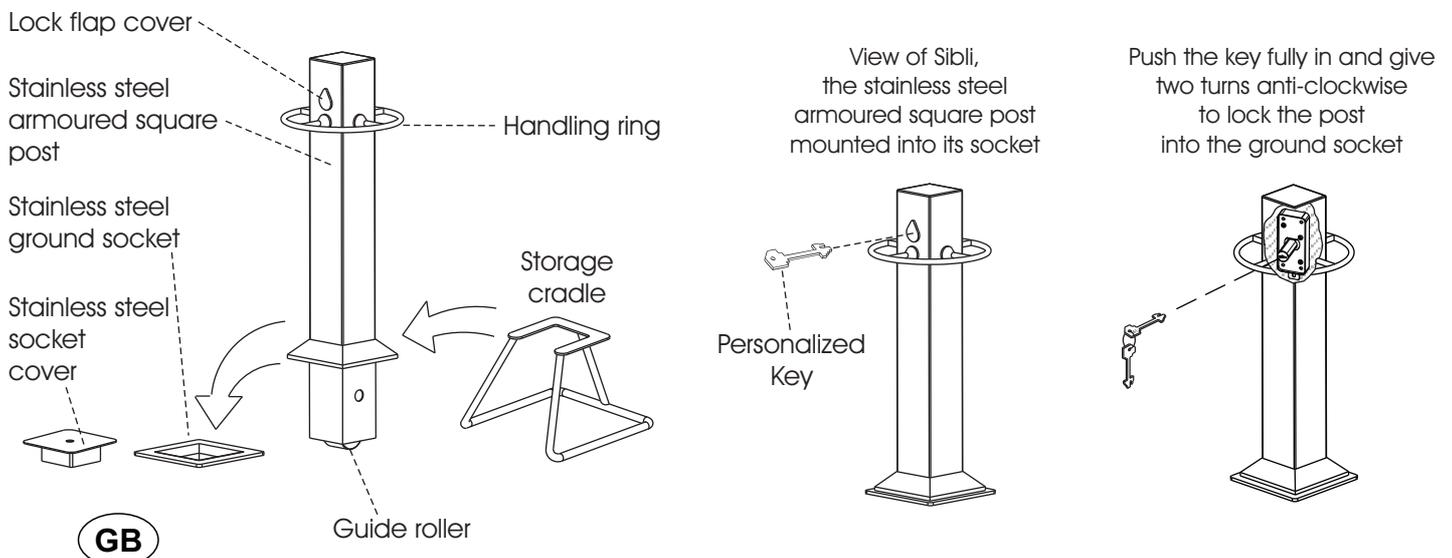

Drwg. No. 3851


INSTALLATION OF THE GROUND SOCKET AND REMOVABLE ARMoured STAINLESS STEEL POST FOR PARKING CONTROL
SIBLI 17 INOX

 **meccanica FADINI**


SIBLI 17 INOX

WHEN SIBLI INOX IS INSTALLED OUTDOOR

It is advisable to fix the stainless steel ground socket 20 mm higher than ground level. Drill some holes having a 5-6 mm diameter in the bottom of the socket, so that water can drain away in the gravel layer.

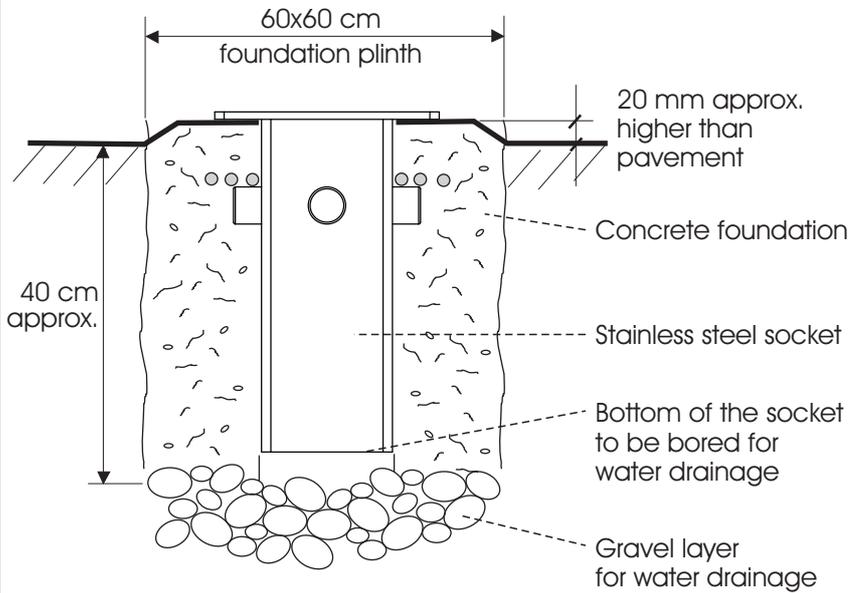

SECTION VIEW OF THE PLINTH

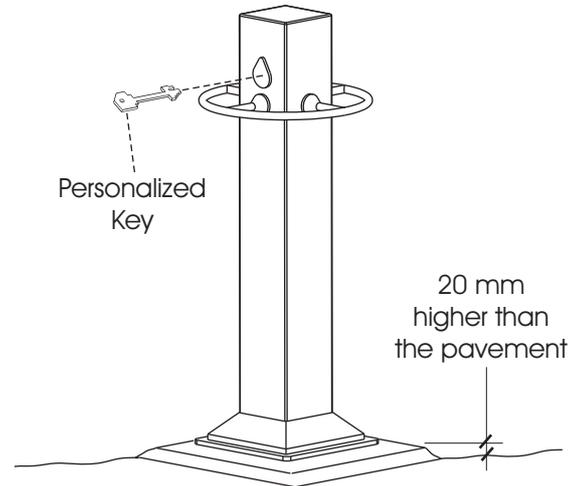



SIBLI INOX WITH GROUND SOCKET
RAISED FROM GROUND LEVEL

- The locking keys can be different one from the other

or

- they can be the same, having the same KA.

- Please specify in the order.

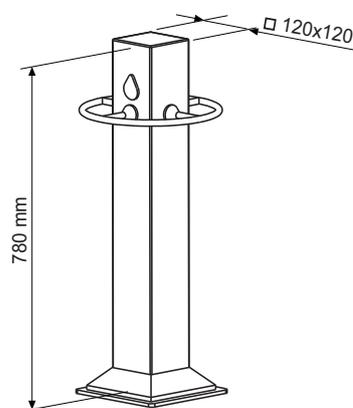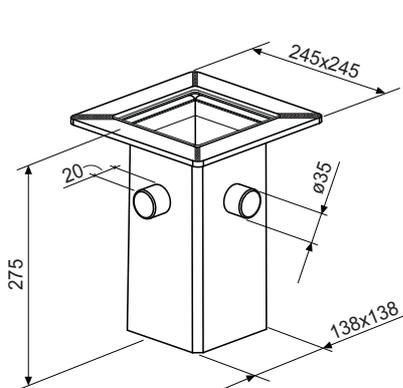

Via Mantova 177/A - 37053 Cerea (Verona) Italy Tel. +39 0442 330422 - Fax +39 0442 331054 e-mail: info@fadini.net - www.fadini.net



Drwg. No. **3851**

INSTALLATION OF THE GROUND SOCKET AND REMOVABLE
ARMoured STAINLESS STEEL POST FOR PARKING CONTROL
SIBLI 17 INOX



meccanica
FADINI