

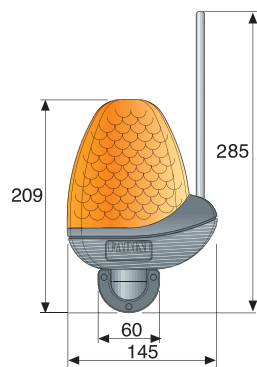




Surface mount



Gate post mount



BIRIO A8 aerial



Miri 4 is a visual warning device emitting led light, 24 Vac/dc or 230 V power supply, to indicate when an automatic gate is being operated. High brightness and visibility in any weather conditions. Energy and costs saving.

The global design shows a geometrical, rounded shape consisting of two parts. A transparent dome, which irradiates light, and a base made of ABS plastic, black in colour, containing the electronic PC card of the unit and the bulb support.

The base is made of two hollow elements fitting together, one on top of the other, allowing a cavity inside to house the electronic PC and an aerial rod (optional) next to it.

The two parts are hermetic against atmospheric agents. The transparent dome is made of methacrylate ester - Oroglax MF I10, shock-resistant, orange in colour, and has a "drop" pattern on the external finish to improve the radiation of light and make the luminous signal well visible from a distance.

Fixing can be either parallel to a fixing wall by using a specially designed bracket providing the unit with a "bayonet" base for fixing; or vertical on top by mounting the unit on a flat base plate. Both versions have holes for cable inlet.

The materials this product is made of are tested to be weather-proof, resistant to shock and heat sources.

TECHNICAL DATA

Power supply	230 Vac / 24 Vac/dc
Power	3 W
Frequency	50 Hz
Absorption	0,006 A (230 Vac) - 0,06 A (24 Vac/dc)
Intermittent approx.	50 cycles/min.
Service	intermittent/fixed
Temperature	-20 °C +80 °C
Light intensity	50 Lux
Clear dome materials	methacrylate - OROGLAX-MFI10 shock-resistant
Weight	300 g
Protection standard	IP 53