

TH1500



FLO2RE

**The kit contains:**

**TH1500** 1 irreversible electromechanical gear motor, with incorporated control unit and plug-in receiver  
**FLO2RE** 2 transmitters 433.92 MHz, 2 channels.

**For sliding gates weighing up to 1,500 kg.**

Irreversible electromechanical gear motor.

**Gear motor characteristics:****• easy and quick installation:**

external mounting, sturdy and practical plate Sturdy and practical

**• sturdy and easy to use Nice** die-cast aluminium key-operated unlock system**• prolonged lifetime and silent operations.****Built-in control unit characteristics:**

**• new control unit THA8**, with receiver compatible with encoding O-Code, Smilo, FloR and Flo. Reliable and safe: with electronic clutch and safety anticrushing protection


**• maximum protection of electronics against external disturbance** with opto-isolated circuits.

Code	Description	Pc./pallet
<b>TH1500KCE</b>	Kit for the automation of sliding gates up to 1,500 kg	16

**N.B.** The content of the package may vary: consult the retailer.

**Technical specifications**

Code	TH1500
<b>Electrical specifications</b>	
Power (Vac 50 Hz)	230
Current absorbed (line) (A)	1.6
Power absorbed (W)	500
<b>Performance</b>	
Speed (m/s)	0.16
Force (N)	800
Work cycle (cycles/hour)	16
<b>Dimensions</b>	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	335x275x203 h
Weight (kg)	13

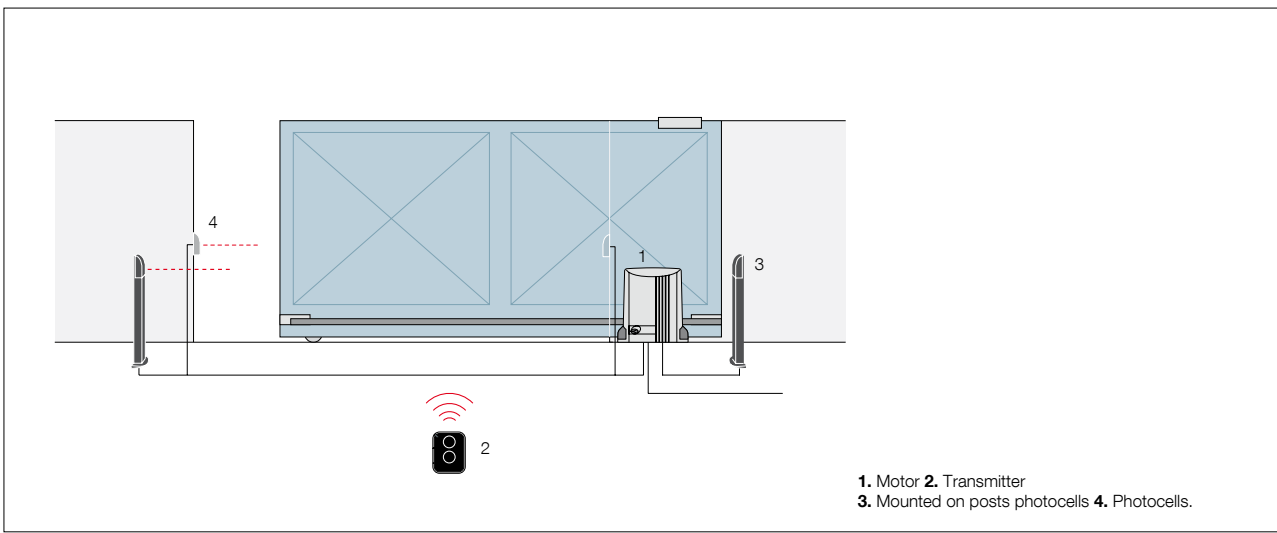

### Accessories



**ROA37**  
Spare control unit,  
only card for TH1500.  
Pc/pack 1



**ROA7**  
M4 rack, zinc coated,  
22x22x1000 mm.  
Pc/pack 10



**ROA8**  
M4 rack, 30x8x1000 mm,  
zinc coated with spacers  
and screws.  
Pc/pack 10



**TS**  
Signboard.  
Pc/pack 1

