Application
Residential, Commercial

Ideal Gate Material
Aluminum or Steel

Dimensions
Page 58

FITS TO TOP OF GATE

Can be used with existing center-mounted hinges.
See page 55 for details.

2 YEAR WARRANTY LIMITED

Mounting system:
• Aluminum, screw-on mounting brackets
• Mounting brackets included
• Fasteners included
• Adjustment tool included

Multiple adjustment options:
• Self-closing speed and force
• Final snap-close action
• Horizontal adjustment
• ADA compliant

Dual Bearing Glide System™
Two rows of bearings for consistently superior performance.
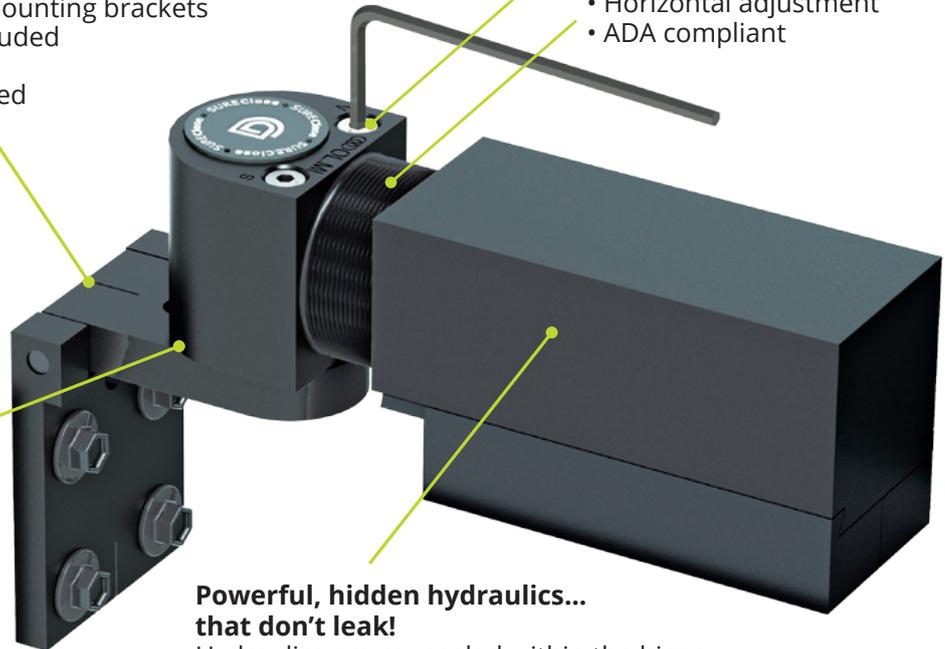
Powerful, hidden hydraulics... that don't leak!
Hydraulics are concealed within the hinge, providing quiet, controlled closure in a tamper-resistant, compact design.
No need to ever add fluid.

Gate Size	Self-Closing Gate Weight Max*
72"H x 40"W (1.8mH x 1mW)	180 lb (80kg)
72"H x 48"W (1.8mH x 1.2mW)	130 lb (60kg)

*CAUTION:
Based on max gate size 72"H x 48"W (1.8m x 1.2m). For gates with greater HxW, or if conditions such as wind play a role, use a different model of SureClose hinge + closer combination with higher self-closing weight ratings.
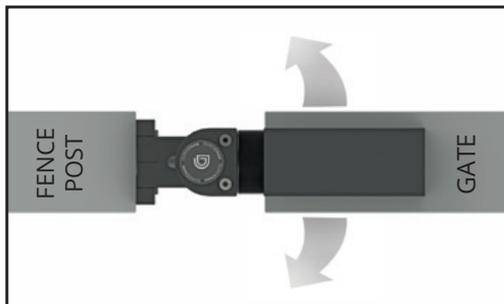
PRODUCT FEATURES

• Add-on hydraulic closer - smooth and quiet

• Usable with most center-mounted hinge types

• Ideal for new or existing gates

• Self-closes gates up to 180 lb (80kg)Easy to install: mounts onto top of gate

• Horizontally adjustable - up to 4" (100mm) gate gaps

• Same features as all 108SF closers

• Opens to, and self-closes from, 90˚ (no hold-open)

• Maintenance free - never add fluid

• High corrosion resistance - thick 50 micron anodizing

CODE*	MODEL	TYPE	BRACKET	GAP VARIANCE	SELF-CLOSING FROM	MAX GATE SWING	POOL/CHILD SAFETY**	FENCE POST SIZE MIN.
72108423	SCE 108SF S	Closer	Aluminum	2" - 4" (50-100mm)	90˚	90˚	Yes	2" (50mm)

| CODE*	MODEL	TYPE	SELF-CLOSING FROM	MAXIMUM GATE SWING	FINAL SNAP ACTION	POOL/CHILD SAFETY**	GAP VARIANCE	FENCE POST SIZE MIN.
72108423	SCE 108SF S	Hinge - Aluminum Brackets	90˚	90˚	Yes	Yes	2" - 4" (50-100mm)	2" (50mm)

*All EASY closers include fasteners, gate and post-mounting brackets.

**Yes (SF) = Gate will not hold open at 90° (OK for safety gates). Do NOT use a hinge with a 90° hold-open feature (-) for pool/child safety gates. Hinges must be at least 36" (900mm) apart so that they cannot be used as footholds by toddlers. IMPORTANT: For maximum gate weights, see weight chart on page 37.

CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90˚. Doing so voids warranty.

[40mm] 1 9/16"

[55mm] 2 1/8"

[67mm] 2 5/8"

[30 - 48mm] 1 3/16" - 1 7/8"

[50 - 200mm] 2" - 4"

[83mm] 3 1/4"

[50mm] 1 15/16"

Hinge pivot point and gate gap must fall within this range

GATE FRAME

1 3/16"–1 7/8" 30-48mm

2" 4" 50 — 100

FENCE POST
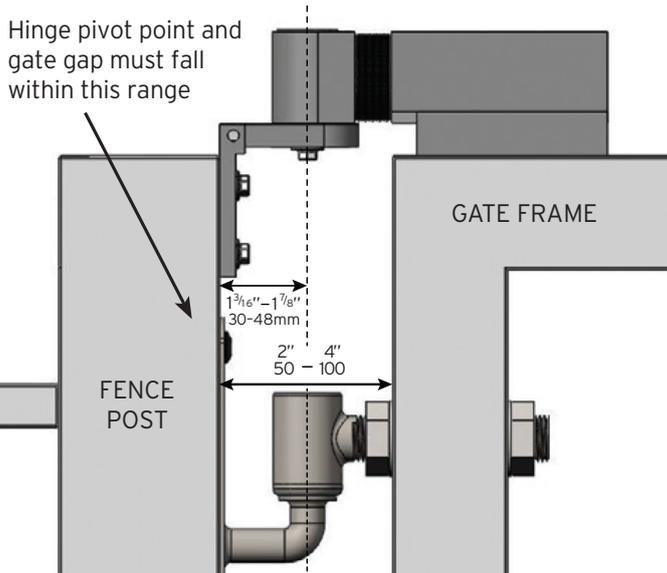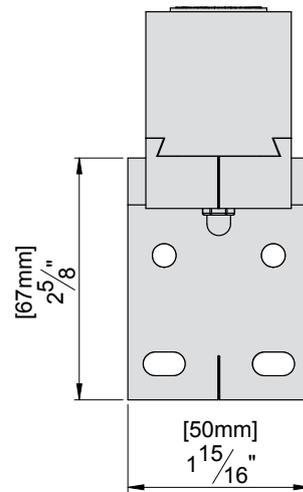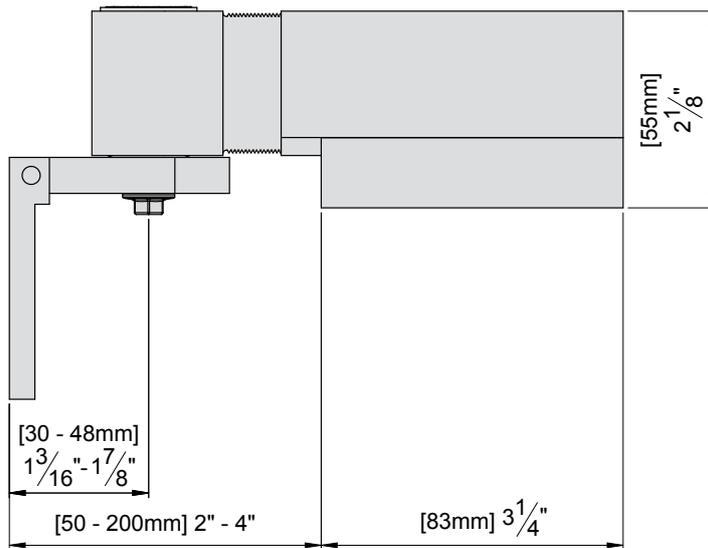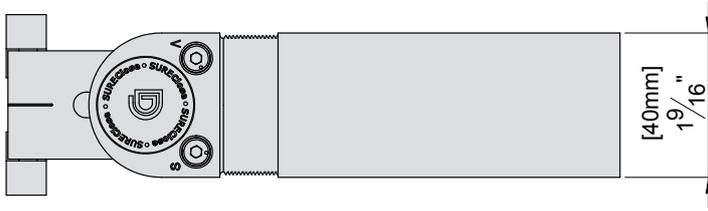
GATE FUNCTION

Final snap-close action
For electric/coded locks

Self-closing
Speed adjustable

EASY Hinge-Closer		**SELF-CLOSING - SAFETY (SF Model)**

EASY Hinge-Closer

Models	Bracket Material
72108423	Aluminum

Mounting Brackets & Fasteners included

SELF-CLOSING - SAFETY (SF Model)

Suitable for child/pool safety*
DO NOT PROP GATE OPEN

Center Mounted:
Center of gate and post are aligned.

FENCE   GATE

⚠ *** CAUTION:**
When used on swimming pool gates, always consult local authorities for swimming pool Codes.

⚠ * CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90˚. Doing so voids warranty.