


DATASHEET

XS4 One

The Salto XS4 One escutcheon is a revolutionary stand-alone electronic lock thanks largely to the level of technology packed inside that brings together the convenience of an offline point -- easy installation and no wires -- with all the power and performance of an online point.

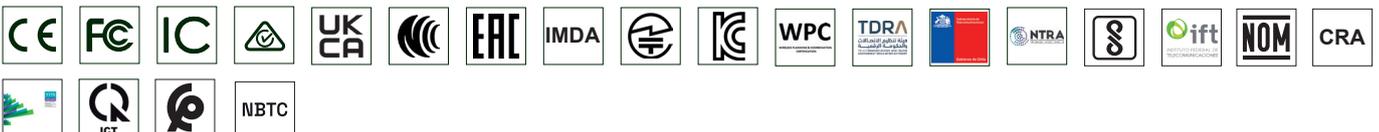

TECHNICAL DATA:

Housing dimensions (H x W x D):	285,0 x 42,0 x 19,5 mm
Weight:	1,5 kg
Handle rotation:	Max. 45°
Door thicknesses:	32 mm - 120 mm
Distance from the handle to the cylinder	47 mm - 110 mm
Square spindles:	7 mm, 7,6 mm split, 8 mm, 8 mm split, 9 mm, 9 mm split
Power source:	3 AAA batteries (LR03 1,5V)
Number of openings	Up to 129.000 operations depending on the technology and the platform.
Maximum events on lock audit	1.861 (Salto Space) 1.462 (Salto KS and Salto Homelok)
Environmental conditions Outdoor	+5 °C / +50 °C without condensation, optional -20 °C / +50 °C
Environmental conditions Indoor	+5 °C / +50 °C. without condensation.
IP class:	IP53 (optional IP55 for external escutcheon)
Certifications:	CE, FC, IC, ACMA, UKCA, NCC, EAC, IMDA, MIC, KCC, WPC, TDRASUBTEL, NTRA, BIS, IFT, NOM, CRA, MPT, VTNA, CMIM, NBTC EN1906 EN 179, EN 1634-1 (Ei60, E260, E90) PAS24 (optional)

OPENING MODES:

Standard:	•
Office mode:	•
Timed office:	•
Automatic opening:	•
Automatic opening + office	•
Toggle:	•
Timed Toggle:	•
Amok mode:	—
Exit leaves open mode:	•
Pin code / Keypad:	—

CREDENTIAL TECHNOLOGIES:


JustIN Mobile Credentials¹:	•
NXP MIFARE²:	•
HID³:	•

¹Bluetooth Digital Key and Near Field Communication (NFC) capability.

² MIFARE® DESFire® EV1/EV2/ EV3, MIFARE® Plus, MIFARE® Ultralight C, MIFARE® Classic.

³ iCLASS®, Seos®.

TECHNICAL DRAWING:

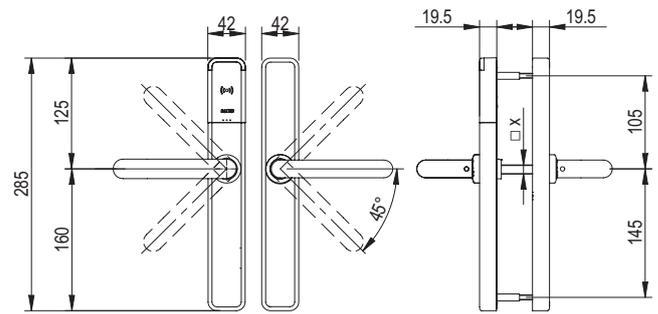

SALTO PLATFORMS:



SVN data-on-card	•	— ²	•
JustIN Mobile	•	•	•
BLUenet Wireless	• ⁴	•	•
Apple Wallet	—	—	•

¹ SALTO Space. On-premise access control platform

² SALTO KS. Cloud-based access control platform

³ SALTO Homelok. Cloud-based access control platform

⁴ RFnet Wireless versions are Not Compatible

FINISH:

IM Satin Stainless Steel - BHMA630 US32D	•
IP Polished Stainless Steel - BHMA629 US32	•
PM Satin Brass Color (PVD) - BHMA731 US4	•
PP Polished Brass Color (PVD) - BHMA724 US3	•
NE Black Chrome - BHMA687	•
DB Dark Bronze (PVD) - BHMA640 US10B	•
BC BioCote anti-microbial	•

READER FINISH:

Black:	•
White:	•

HANDLES

Compatible handles*	B, G, H, I, J, K, L, N, O, P, S, T, U, W, Y, Z, 2, 3, 4, 5, 7
High Transit:	• (optional)

* Not all the handles are available in all finishes.


LOCKS:

Euro-DIN:	•
Tubular:	•

MODELS:

Ex750:


2 handles any type.

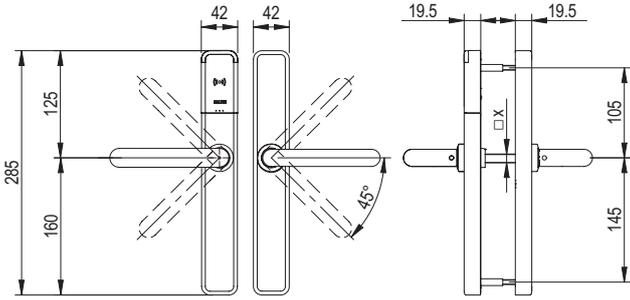

Ex757:

2 handles any type.


- Outside cylinder cut out.
- Electronic "do not disturb" system (Not available in self-programmable).

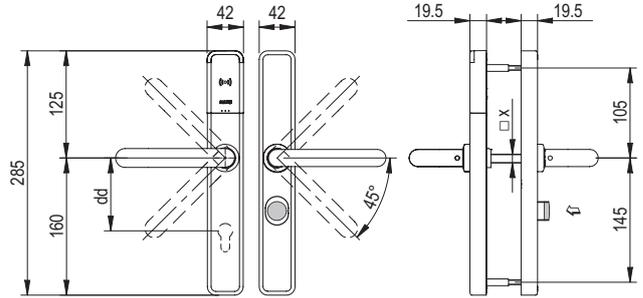

Ex751:

2 handles any type.


Inside thumbturn.

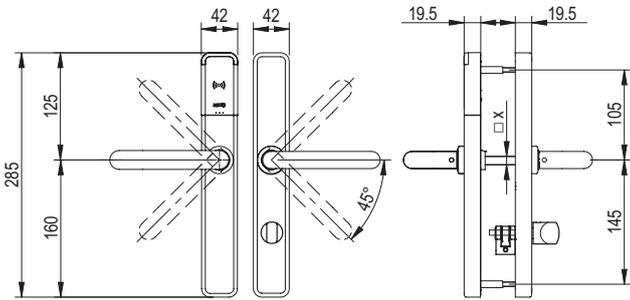

Ex7P0:

2 handles any type.


- Built in mechanical override with audit.
- (Ex4P0 reference: Euro profile cylinder 30-10).

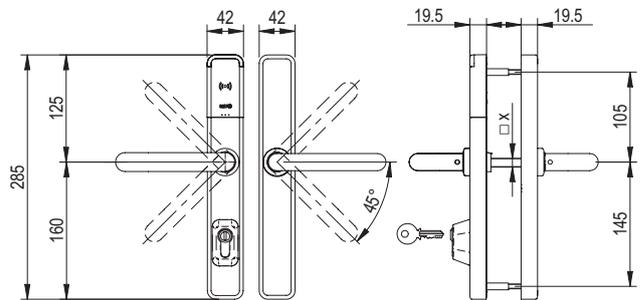

Ex752 / Ex753 / Ex754

2 handles any type.


Inside (models 52 / 53) / (models 54) Outside cylinder cut out.

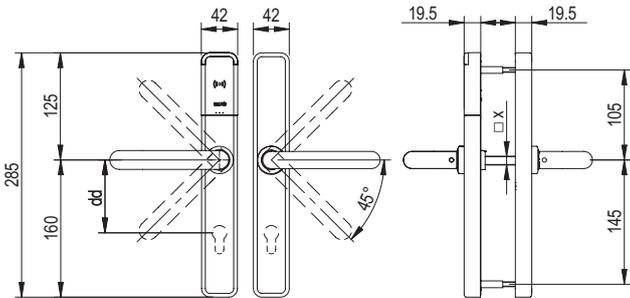

Ex7P1:

• 2 handles any type.


- Inside thumbturn.
- Built in mechanical override with audit.
- (Ex4P1 reference: Euro profile cylinder 30-10).

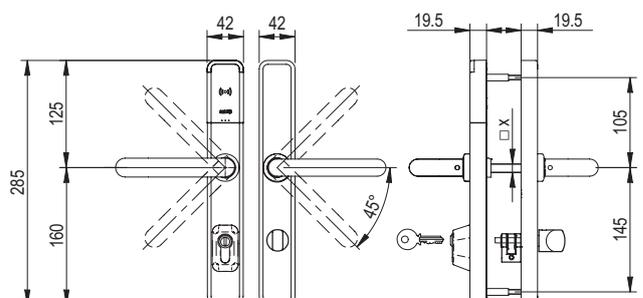

Ex756:

2 handles any type.


Electronic "do not disturb" system (Not available in self-programmable).

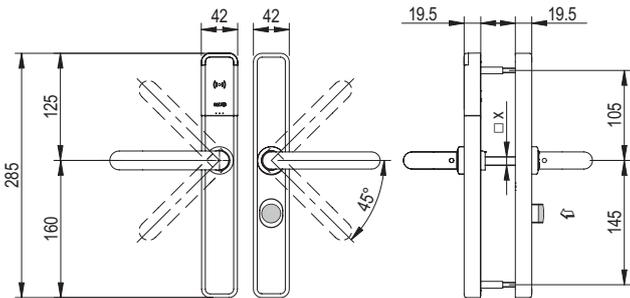

Ex7P6:

• 2 handles any type.

- Electronic "do not disturb" system
- Built in mechanical override with audit.
- (Ex4P6 reference: Euro profile cylinder 30-10).

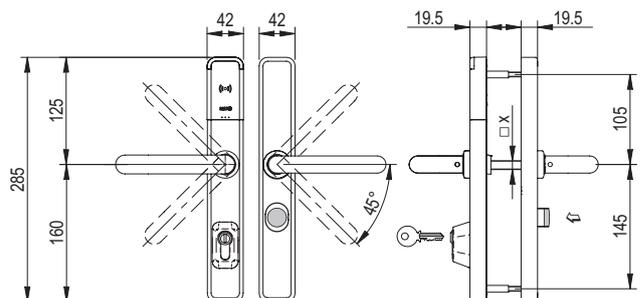

Salto Systems.

Get in touch with our team.

Give us a brief summary of your needs, your next project and we'll get back to you.

Spain, UK, France, Germany, Switzerland, The Netherlands, Belgium, Poland, Slovakia, Slovenia, Czech Republic, Denmark, Norway, Sweden, Finland, Italy, Portugal, US (NYC - Atlanta - LV), Canada, Mexico, Costa Rica, Colombia, Puerto Rico, Chile, UAE, India, South Africa, Singapore, China, Hong Kong, Korea, Vietnam, Australia, New Zealand.

