
## D° SURE**Close**° READY**Fit**

## **Externally Mounted**

CODE*	MODEL	ТҮРЕ	SELF-CLOSING FROM	MAXIMUM GATE SWING	FINAL SNAP CLOSE ACTION	POOL/CHILD SAFETY**	GAP VARIANCE	FENCE POST SIZE MIN
74001313	RF SM S	Hinge - Aluminum Brackets	-	180°	-	=	½" - 1 ¾" (12-35mm)	2" (50mm)
74001315	RF SM W	Hinge - Steel Brackets	-	180°	-	-	½" - 1 ¾" (12-35mm)	2" (50mm)
74108313	RF 108 S	Hinge/Closer - Aluminum Brackets	85°	180°	Yes	-	½" - 1 ¾" (12-35mm)	2" (50mm)
74108315	RF 108 W	Hinge/Closer - Steel Brackets	85°	180°	Yes	-	½" - 1 ¾" (12-35mm)	2" (50mm)
74108323	RF 108SF S	Hinge/Closer - Safety Feature - Aluminum Brackets	90°	90°	Yes	Yes	½" - 1 ¾" (12-35mm)	2" (50mm)
74108325	RF 108SF W	Hinge/Closer - Safety Feature - Steel Brackets	90°	90°	Yes	Yes	½" - 1 ¾" (12-35mm)	2" (50mm)

CAUTION: A gate stop must be installed when using SF models. Gate must not be allowed to open past 90". Doing so voids warranty.



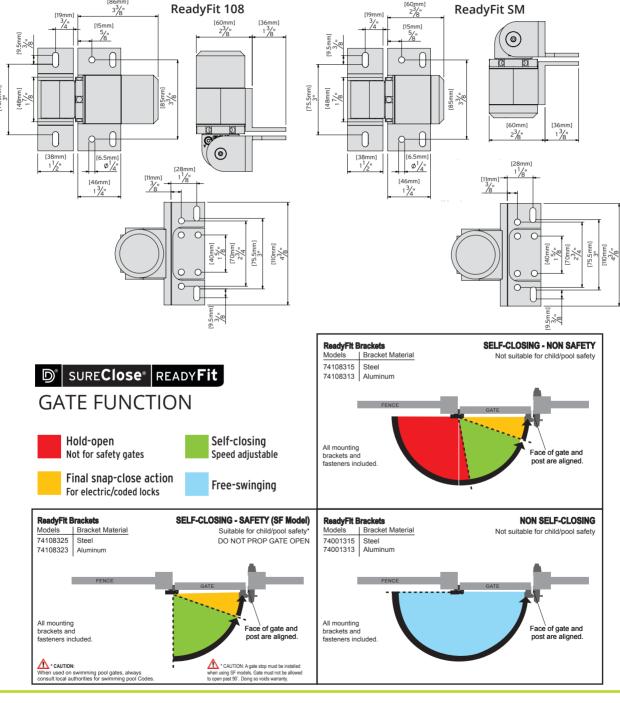

54 D&D Technologies - World's most trusted gate hardware



<sup>\*</sup>All mounting brackets and fasteners are included with ReadyFit Hinges.
\*\*Use only SF model closers on pool/safety gates. Hinges must be at least 36" (900mm) apart so that they cannot be used as footholds by toddlers. IMPORTANT: For maximum gate weights, see page 32