

Metal waterproof HID & EM reader




CHARACTERISTICS

- Metal structure, waterproof, fully potted, confirms to IP65
- Very low power consumption
- Testing: electrical fast transient burst generator 3.5KV
- Anti-magnetic: Preventing access by strong magnetic object
- Anti-tamper, LED and buzzer controlled via external controller
- Nice option for storage rooms, banks, offices, prisons etc.
- Wiegand 26 output, other formats customisable from 26-37

TECHNICAL SPECIFICATIONS

- Dimensions: 128 x 82 x 28 mm
- Power supply: 12 VDC
- Card type: 125 KHz EM & HID
- Stand-by current: ≤ 30 mA
- Response time: 0.1 second
- Reading range: 3-6 cm
- Anti-pass-back: yes
- Communication interface: Wiegand 26 – 37
- Protection: IP65
- Antistatic: 15 KV
- Transmit Distance: 100 m
- Cable Length: 90 – 100 cm
- Operating temperature: $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$ ($-40^{\circ}\text{F} \sim 140^{\circ}\text{F}$)
- Operating humidity: 0 – 95 %
- Model: wide

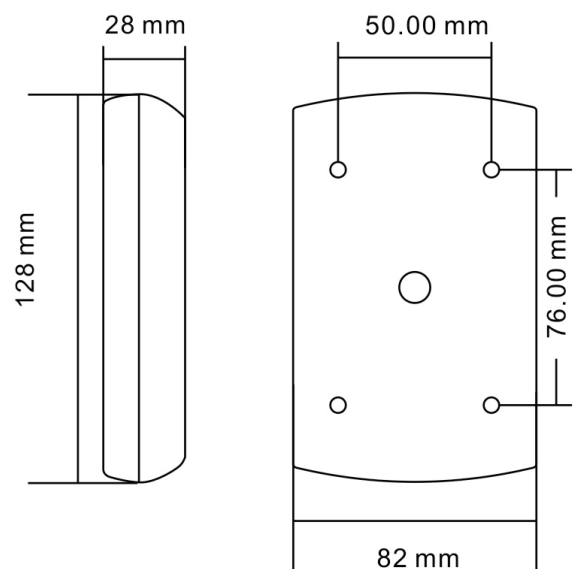

ORDER INFORMATION

- PA240206 - Metal waterproof HID & EM reader